

MODEL TL-4920

International size reference: C, ER26500

大豪电子

电话: 0755-83233025

<http://www.szdahao.com>



<http://www.very-tec.com>

TADIRAN LITHIUM BATTERIES

TECHNICAL DATA



(Typical values @+25°C for batteries stored for one year or less)

| | |
|--|---|
| <ul style="list-style-type: none"> ■ Nominal capacity @ 3 mA, to 2 V ■ Rated voltage ■ Maximum recommended continuous current ■ Maximum 1 sec. pulse capability ■ Weight ■ Volume ■ Operating temperature range ■ U.L. Component Recognition, MH 12193 | <p>8.5 Ah</p> <p>3.6 V</p> <p>75 mA</p> <p>200 mA</p> <p>49.5 g (1.746 oz)</p> <p>26 cc</p> <p>-55 °C to +85 °C</p> |
|--|---|

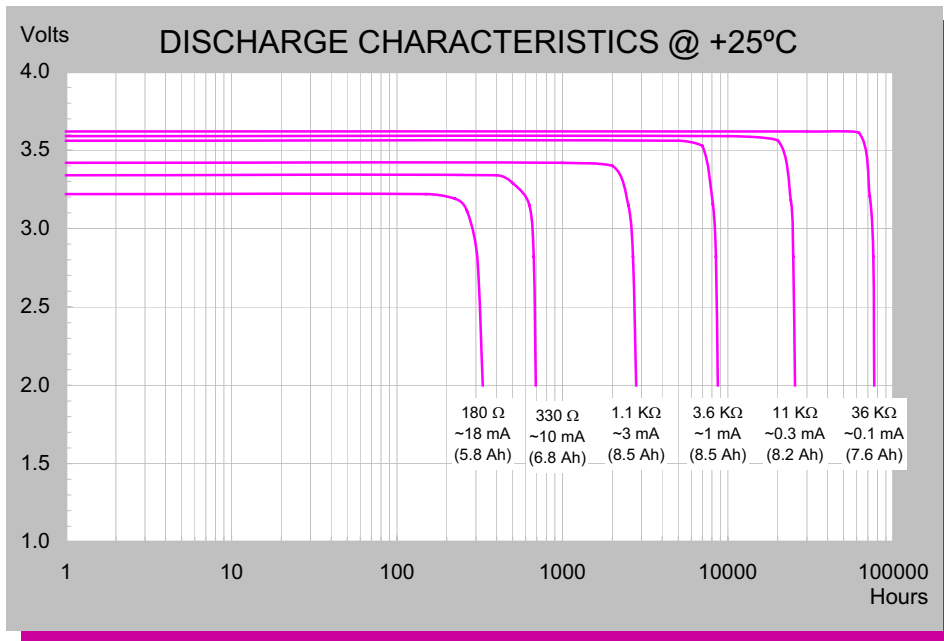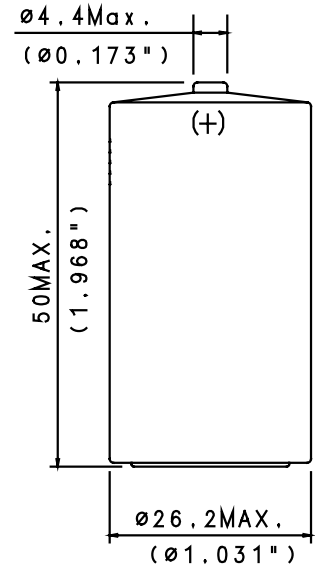

AVAILABLE TERMINATIONS

| | |
|------------------------|---------------|
| SUFFIX- /S STANDARD | 15-4920-21000 |
| SUFFIX- /T SOLDER TABS | 15-4920-31000 |

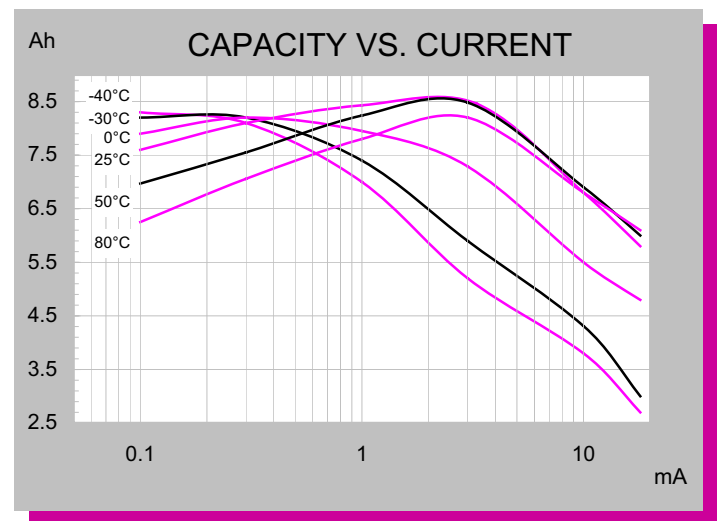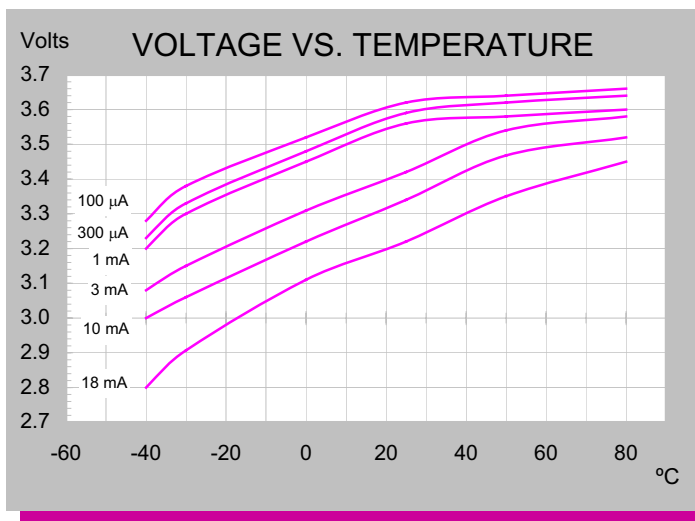

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06